



FOUR SEASONS
INCORPORATED

PROJECT PORTFOLIO
EDUCATIONAL

McEwen High School



Welcome to McEwen High School
Home of the Warriors

The McEwen High School remodeling and expansion project was envisioned as part of a larger plan to alleviate the damage caused to Humphreys County's educational infrastructure by the devastating flood of August 2021.

Lashlee-Rich, Inc. carried out the planning, engineering, and construction of the project. In April 2023, FourSeasons joined the project to deliver customized HVAC and clean air solutions for the entire facility.

A comprehensive HVAC system was installed throughout the 89,648 square-foot area to efficiently service the new cafeteria, gymnasium, auditorium, library, and a two-story building containing 34 classrooms.




LOCATION: MCEWEN, TN



AREA: 89,648 SQ. FT.



DURATION: 28 MONTHS

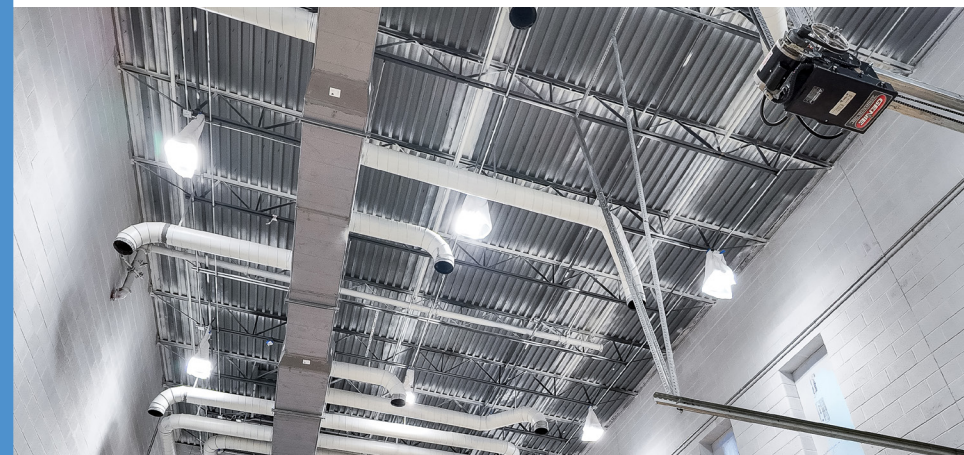

Our scope of work included installing twenty-two Trane rooftop units, a kitchen exhaust hood with connected exhaust fans, and a make-up air unit. We also set fifty-nine VAV terminal units, ductwork, grilles/diffusers, and louvers throughout the building, including fabric duct in the new gymnasium for a more efficient airflow dispersion. All connected to a Trane DDC controls system.

The McEwen High School project was completed in August 2025, with all systems successfully installed, tested, and operational.

Many thanks to Lashlee-Rich, Inc. for partnering with FourSeasons on the construction of this K-12 school. A meaningful project for the McEwen community.

“

FourSeasons performed very well on this project, kept up with our scheduling, and did a great job providing enough labor to complete the work. They worked well with other subcontractors. We are very pleased with their performance. We look forward to working with them on future projects.

”

- Billy Hill
Project Manager at Lashlee-Rich, Inc.

EQUIPMENT INSTALLED:

- 22 Trane Precedent rooftop units
- 4 Bard Wall-Mounted heat pumps
- 1 CaptiveAire kitchen hood, exhaust fans, and a make-up air unit
- 4 Mitsubishi ductless split systems
- 59 Trane VAV terminal units
- 9 Greenheck exhaust fans

